

TEST CERTIFICATE

Determination of the anti-slip property of floor coverings in workrooms and fields of activities with slip danger

Tested material: **Wood / wooden composite material**

Kind of material
(wood): oak wood parquet, impregnated
Article description: LOBASOL® HS 2K ImpactOil
Dimensions: 1000 x 500 x 5 [mm]
Colour: wooden slats in light- and darkbrown;
flooring oil transparent
Surface: according to statement factory-made grounded
(graining 100) and oiled; even, fine rough structured
Addition: consumption: 30-60 g/m²
Producer/Supplier: LOBA GmbH & Co. KG
Leonberger Str. 56-62
71254 Ditzingen

Client: LOBA GmbH & Co. KG
Leonberger Str. 56-62
71254 Ditzingen

Certificate No.: 84821801.001e

Test date: 04.10.2018

Sampling: Sent by the customer to the research institute


Test method: **DIN 51130** (edition 02/2014)
"Testing of floor coverings - Determination of the anti-slip property -
Workrooms and fields of activities with slip danger - Walking method - Ramp test"
Delivery of the test material has been effected in ready-to-test surface condition.

Test result: Average total acceptance angle: **15,1°**

Assessment: **Classification group of anti-slip property: R 10**

SÄUREFLIESNER-VEREINIGUNG e. V.
Institut für Wand- und Bodenbeläge
Managing Director


Dipl.-Ing. Friedrich Höltekemeyer

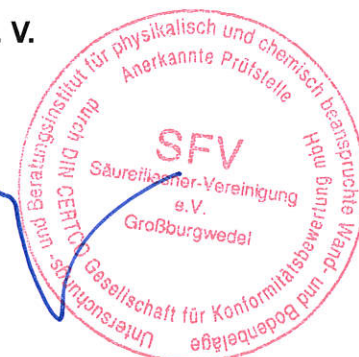

Großburgwedel, 16.10.2018
Schu/pp-ed

This test certificate is valid as long as there is no change in the above mentioned test-basis - for products which are identical to the test specimen. The certificate is given for 5 years (starting from test date). Publication and reproduction of this certificate is only allowed in unabridged form.



– Institut für Wand- und Bodenbeläge –
SÄUREFLIESNER-VEREINIGUNG E.V.

Im Langen Felde 4, 30938 Burgwedel · Telefon (0 51 39) 99 82-0 · Telefax (0 51 39) 99 82-40 · E-Mail: info@saeurefliesner.de

